
Waterproof Submersible Ultrasonic Cleaner

Features:

- ❖ Convenient preset function of heating and timer
- ❖ HF frequency 25/28/40 kHz
- ❖ Temperature range from ambient to 80°C
- ❖ Bottom-mounted drain valve
- ❖ Maximum 99 minutes cleaning time
- ❖ Microprocessor control: timer, temperature and output control
- ❖ LCD display



Submersible Ultrasonic Transducer and Generator

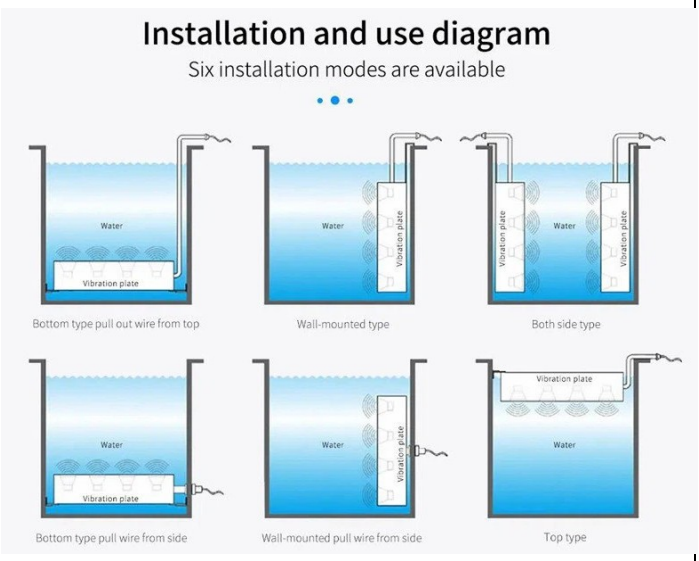

Model No.	AST-1012P	AST-1018P	AST-1024P	AST-1030P	AST-1036P	AST-1040P	AST-1048P
Ultrasonic power(w)	600	900	1200	1500	1800	2000	2400
Transducer quantity(pcs)	12	18	24	30	36	40	48
Ultrasonic frequency	17/20/25/28/40/53/68/80/100/132/170/200Khz						
Material	SUS304 or SUS316L 2.0-3.0mm thickness chrome coated						
Power supply	AC220V±10% 50/60Hz or AC220V±10% 50/60Hz						
Transducer box size mm	350*300*100	450*300*100	550*400*100	580*450*100	600*500*100	650*550*100	700*600*100

Waterproof Immersible Ultrasonic Transducer can be installed in the tank by three ways as above, the fix way is customized.